

Optical Transmit / Receive Components

Features


Customized design and production available

Excellent stability, flexibility and versatility



Storage Temperature Range: -40°C~+85°C

Both SC and LC receptacle are available

ROSA LC Receptacle

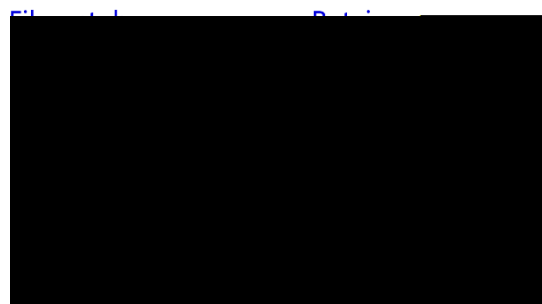

TOSA Receptacle

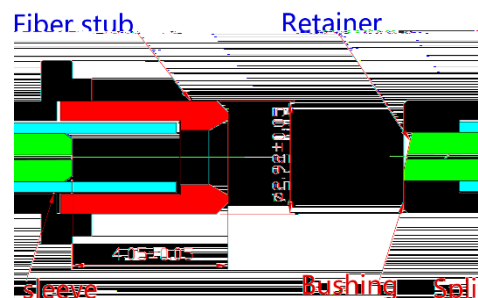

Specification

Stub Concentricity	(μm)	≤ 0.7
Insertion Loss	(dB)	≤ 0.2
Return Loss	(dB)	≥ 45
Split Loss		Ceramic
Bushing		SUS 316F
Retainer		SUS 316F
Wiggle Test		IEC 62150-3-2012