


MTP/MPO Hydra Cable

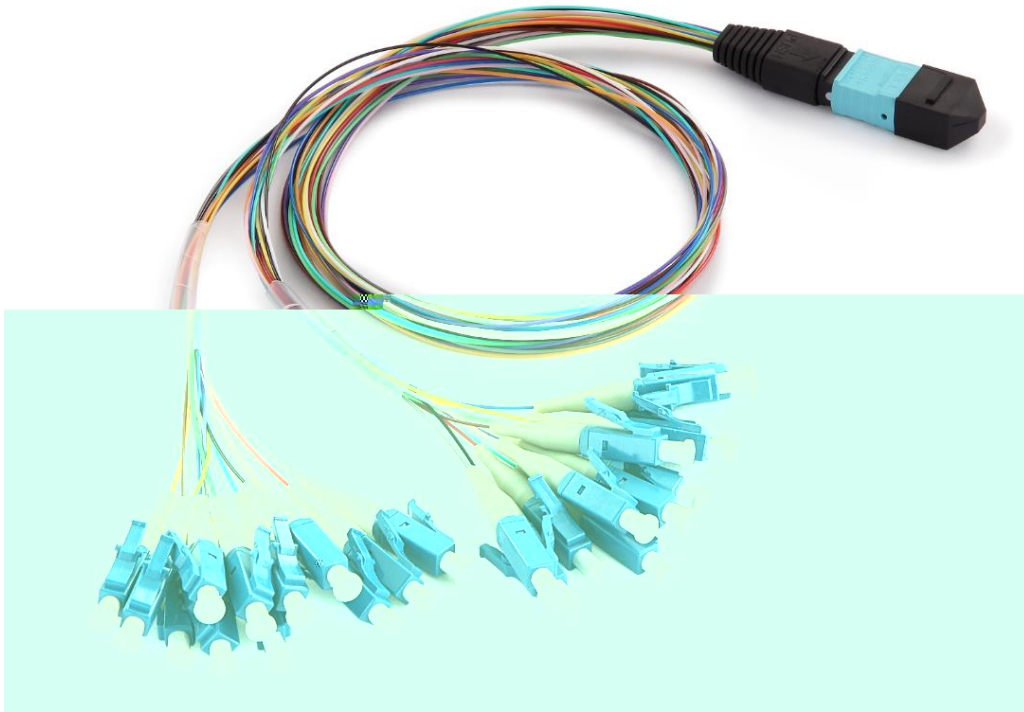

MPO/MTP Hydra cable assemblies are deployed inside plug and play cassette modules. It is used for multi-fiber to single-fiber splitting and interconnects. This solution is a 30-core, 0.9mm diameter utilizing MPO/MTP connector on one end and generic connectors (such as LC, SC, FC, etc.) on the other end. They are available for purchase as a bundle with plug and play modules, MPO/MTP Adapter Plates, and other solutions. It is fully configurable, available in 8/12/16/24 fibers versions as well as Multi-mode (Standard 50/125, 62.5/125, BI 10Gig 50/125) and Single-mode fiber types.

Applications

- Data Center Interconnect
- Backbone Installations
- Telecommunication Networks
- Broadband/CATV Networks
- LAN/WAN premise

Features

- Low insertion loss and high return loss
- High precision connector
- PC UPC APC end face polish
- Fiber count available in 4~24

Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
86-755-2293688 | info@china-tscom.com | www.china-tscom.com



- Option for LSZH, PVC or Hytrel loose tube
- 100% factory terminated and tested
- Customized length available
- ROHS Compliant

Standards compliance

- EIA/TIA 604 series
- IEC 61754 Series
- IEC 61753-1
- GR 1435-CORE
- GR 326-CORE

General Specification

	Description	
Fiber Count	8~24 Fibers	
Fiber Mode	Single mode: G652/G657 Multimode: OM1 OM2 OM3; OM4	
Fiber Brand	SMF-28® Ultra optical fiber Corning ClearCurve® multimode fiber	
Cable Jacket Material	Low Smoke Zero Halogen (LSZH) PVC Hytrel	
Cable Jacket Ratings	Riser (OFNR) Plenum (OFNP)	
Cable Jacket diameter	600µm; 900µm	
Cable Jacket Color	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Purple, Pink, Aqua	
Polarity	Customized	
MPO/ MTP	Ferrule	12F, 16F, 24F
	Connector Type	MTP, MPO
	Connector Brand	US Conec MTP, Senko MPO, Nissin MPO, Sanwa MPO, FURUKAWA MPO
	Connector Color	Ferrule SM(APC)

Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information



Technical Specification

MPO / MTP Termination

Optical Properties	Single mode		Multimode	
	Low loss	Standard	Low loss	Standard
Insertion Loss (dB)	≤ 0.35 (Typical: ≤ 0.25)	≤ 0.75 (Typical: ≤ 0.4)	≤ 0.35 (Typical: ≤ 0.2)	≤ 0.60 (Typical: ≤ 0.35)
Return Loss (dB)	PC ≥ 50 ; APC ≥ 60		PC ≥ 20	
Wavelength (nm)	1310/1550		850/1300	
Durability	≤ 0.2 (dB)typical change, 50 matings			

Single-fiber connector Termination

Optical Properties	Single mode		Multimode	
Insertion Loss (dB)	UPC ≤ 0.2 ; APC ≤ 0.3		PC ≤ 0.2	
Return Loss (dB)	PC ≥ 50 ; APC ≥ 60		PC ≥ 20	
Wavelength (nm)	1310/1550		850/1300	
Durability	≤ 0.3 (dB)typical change, 500 matings			