


4MPO/MTP®-LC (12F) Metal Module Cassettes

Match for UltraX/Y/N/S/M Series Enclosures

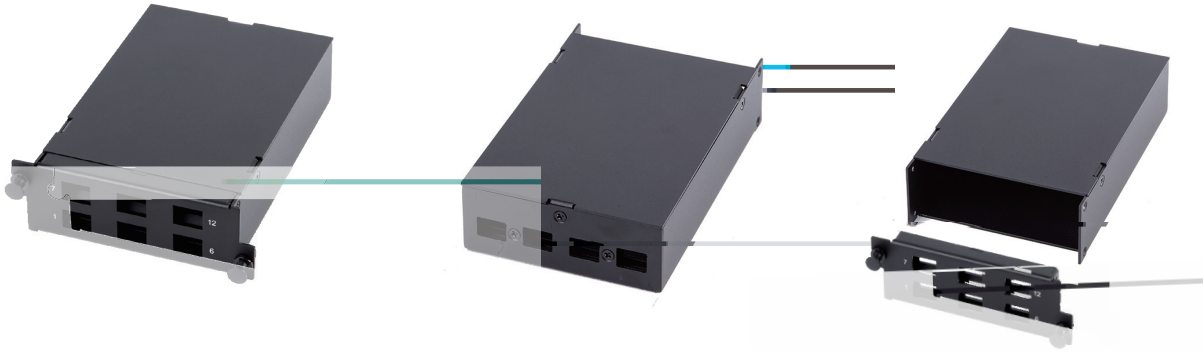

Description

connectors into LC connectors. Four metal cassette accommodate 48 channels within a 1U space,



Optic Performance

Parameters	Unit	SM	SM		
		®	®	®	®
Max Insertion Loss	dB	0.6	0.6	0.6	0.6
Typical	dB	0.35	0.35	0.30	0.30
Min Return Loss	dB	55	60	20	20

